



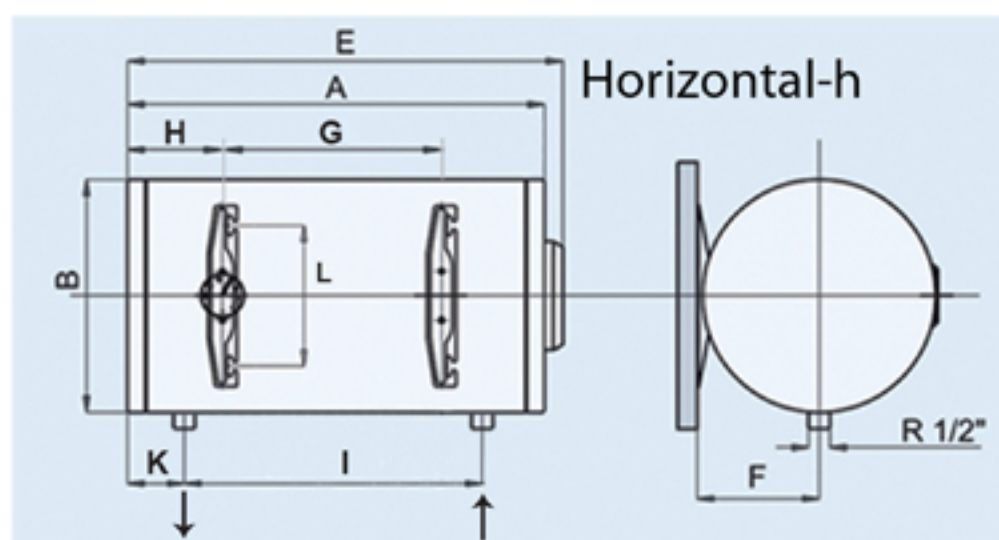

Type	A	B	E	F	G	H	I	K	L	Packung / mm
AD - 40 h	420	ø 440	469	230	100	172	80	170	260	480 / 460 / 490
AD - 50 h	490	ø 440	540	230	171	172	150	170	260	480 / 460 / 555
AD - 60 h	565	ø 440	615	230	246	172	233	170	260	480 / 460 / 625
AD - 80 h	740	ø 440	790	230	417	172	400	170	260	480 / 460 / 810
AD - 100 h	895	ø 440	945	230	576	172	557	170	260	480 / 460 / 955
AD - 120 h	1060	ø 440	1110	230	741	172	720	170	260	480 / 460 / 1120
AD - 150 h	1240	ø 440	1290	230	920	172	900	170	260	480 / 460 / 1300

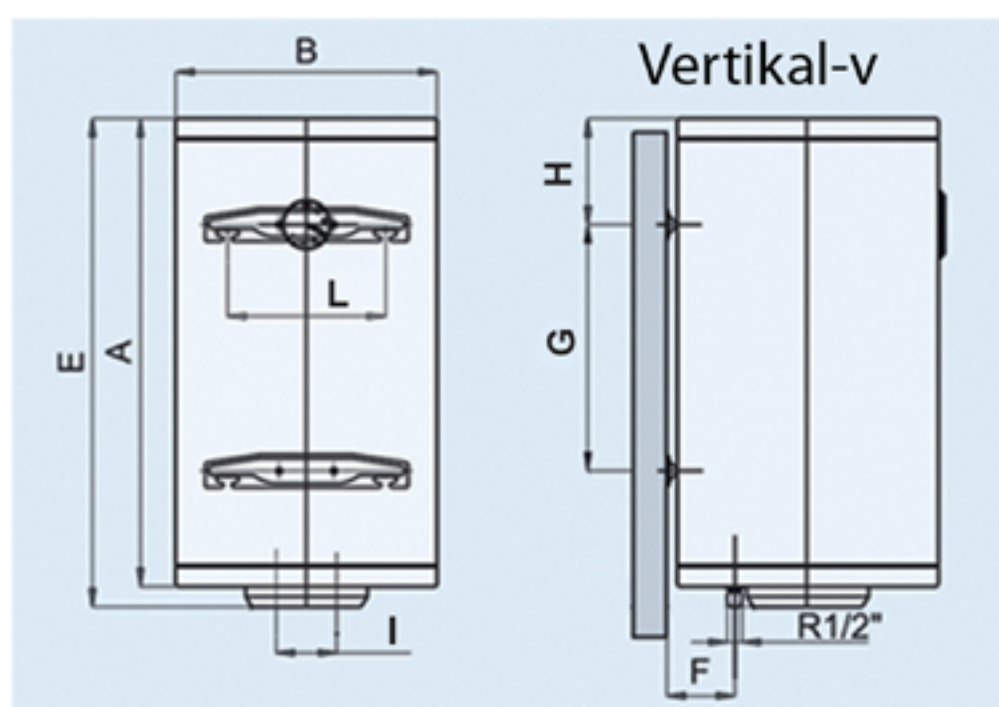

Type	A	B	E	F	G	H	I	L	Packung / mm
AD - 30 v	340	ø 440	388	110	-	172	100	260	480 / 460 / 410
AD - 40 v	420	ø 440	469	110	-	172	100	260	480 / 460 / 490
AD - 50 v	490	ø 440	540	110	-	172	100	260	480 / 460 / 555
AD - 60 v	560	ø 440	615	110	-	172	100	260	480 / 460 / 625
AD - 80 v	740	ø 440	790	110	-	172	100	260	480 / 460 / 810
AD - 100 v	895	ø 440	945	110	576	172	100	260	480 / 460 / 955
AD - 120 v	1060	ø 440	1110	110	741	172	100	260	480 / 460 / 1120
AD - 150 v	1240	ø 440	1290	110	920	172	100	260	480 / 460 / 1300

		AD - 30 v/h	AD - 40 v/h	AD - 50 v/h	AD - 60 v/h	AD - 80 v/h	AD - 100 v/h	AD - 120 v/h	AD - 150 v/h
Volume	L	30	40	50	60	80	100	120	150
Electric voltage	V	230	230	230	230	230	230	230	230
Electric power	W	1500	1500	1500	2000	2000	2000	2000	2000
Electric energy	A	6,8	6,8	6,8	9,1	9,1	9,1	9,1	9,1
Max working pressure	MPa	0,6	0,6	0,6	0,6	0,6	0,6	0,6	0,6
Weight / filled	Kg	15 / 45	16.5 / 56.5	19 / 69	21 / 81	24 / 104	30 / 130	33 / 153	37 / 187
Time for heating 10 - 65 °C/min		88	100	130	110	150	180	200	215